Behringer ECM8000

Pre-Sequence Inputs:

ID: 1706036

Notes:

Setup: Spectra precision measurement chamber SQ4.2 ## Reference Mic G.R.A.S. 40AE ## Power supply NTI IS1002 ## Ref Calibrator Bruel&Kjaer 4231 Limits compared to IEC61672 class 2

Summary

Signal Path1

Acoustic Response	PASSED

Sequence Result:

Sequence Result:	PASSED

APx Instrument

Instrument ID:	11083
Calibration Date:	09.07.2021
APx Version:	4.5.0.389.121445


Signal Path1 : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	1
Source Impedance:	20 ohm
AG52 Generator Option:	Installed
Output EQ:	EQTable1.csv
Input Connector:	Analog Balanced (Acoustic)
Channels:	2
Termination:	200 kohm
High Performance Sine Analyzer:	Disabled
Input Bandwidth:	AC (<10 Hz) - 22.4k (48 kHz SR)
Device Delay:	0,000 s
Input EQ:	None
• References	
dBr G:	100,0 mVrms
dBm (Output Power):	600,0 ohm
W(watts) (Output Power):	8,000 ohm
Shared Frequency Reference:	1,00000 kHz
Sensitivity (Ch1):	54,51 mV/Pa
Serial Num (Ch1):	
Sensitivity (Ch2):	9,430 mV/Pa
SerialNum (Ch2):	
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3,300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3,300 V
Edge:	Rising

Signal Path1 : Acoustic Response

Generator Level:	800,0 mVrms
DC Offset:	0,000 V
EQ:	Signal Path EQ
Start Frequency:	31,5000 Hz
Stop Frequency:	20,0000 kHz
Sweep:	5,000 s
Pre-Sweep:	0,000 s
Extend Acquisition By:	0,000 s
Averages:	1
Secondary Source:	None
Measured 1	05.01.2018 12:58:27

RMS Level -> Compare (Ratio) -> Smooth -> Normalize (05.01.2018 12:58:27.736)

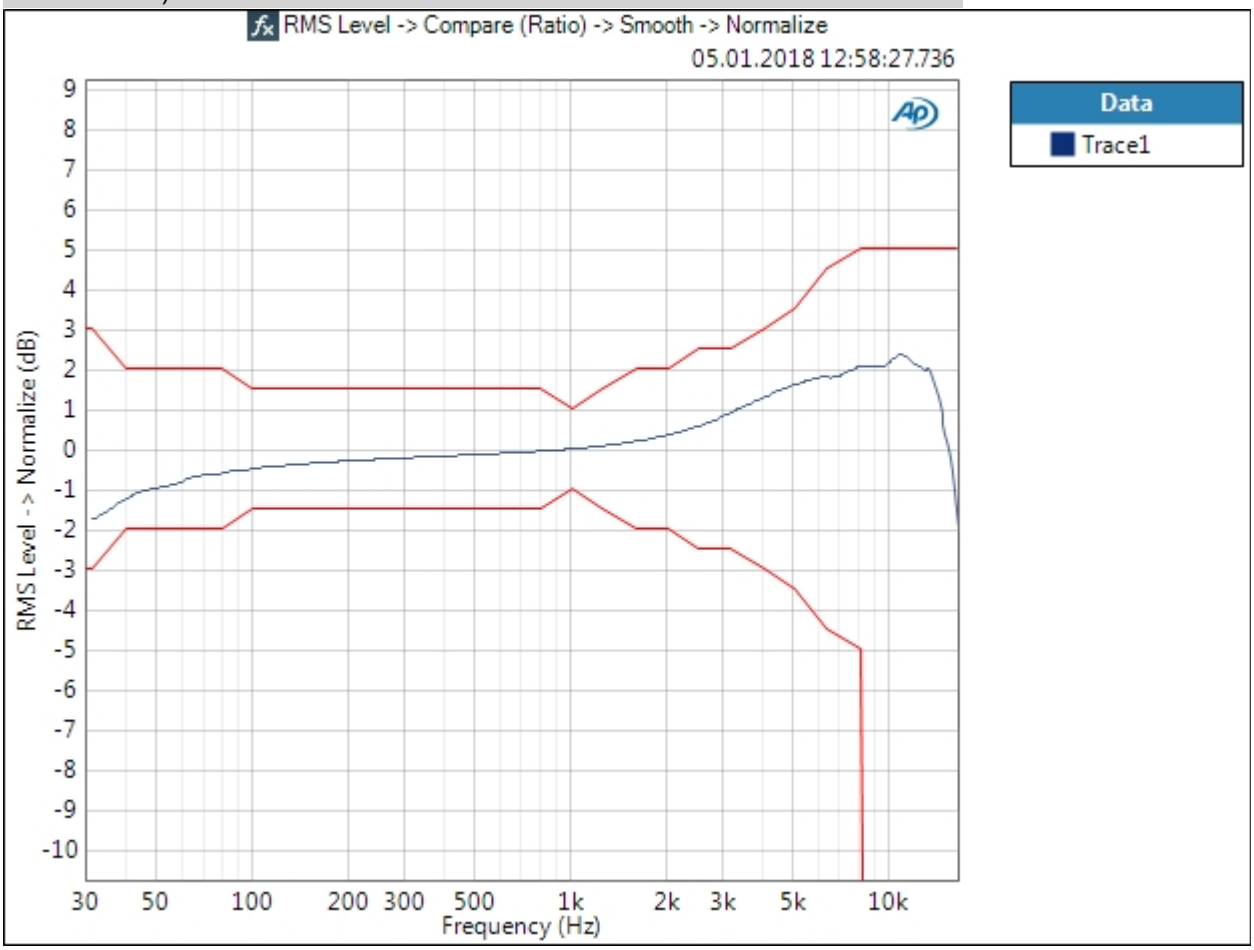

Trace1 PASSED

RMS Level -> Compare (Ratio) -> Smooth -> Normalize Parameters

Mode:	Normalize
X Reference:	1,00000 kHz
Source:	RMS Level -> Compare (Ratio) -> Smooth
Smoothing:	1/6 octave
Source:	RMS Level -> Compare (Ratio)
Source:	RMS Level
Trace1	[Ch1], [Most Recent Data Set], [Ch2], [Most Recent Data Set]

Result: PASSED